


**SECTION I**  
**GENERAL SAFETY FOR**  
**THE UNIVERSAL P.E. LABELER**

SERIAL NR. KC396

- 1. STOPPING THE LABELER IN AN EMERGENCY.** There are **TWO EMERGENCY STOP PUSHBUTTONS** located on the **LABELER** (fig.1-1 and fig.1-2).

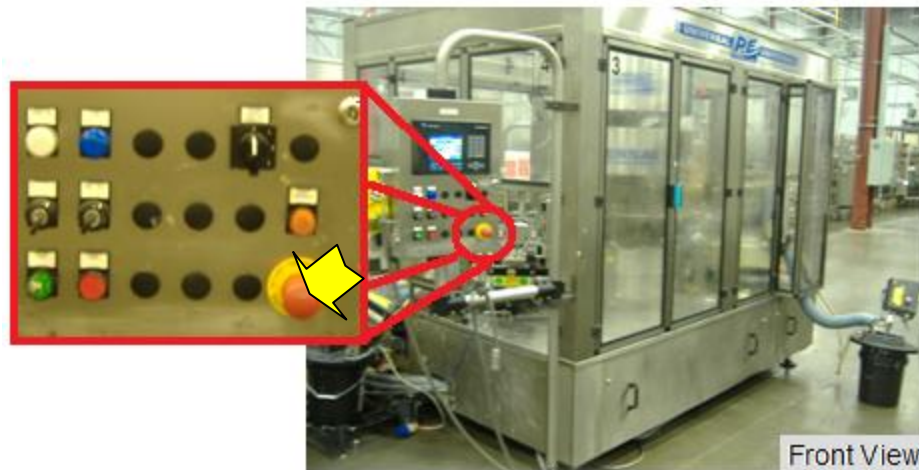

*figure 1-1: Location of EMERGENCY STOP PUSHBUTTON.*



*figure 1-2: Location of EMERGENCY STOP PUSHBUTTON.*

2. To restart the **LABELER** after using the **EMERGENCY STOP PUSH BUTTON** you will need to:

a. Pull out the **EMERGENCY STOP PUSHBUTTON** (*fig.2-1*).



*figure 2-1: Pull out the EMERGENCY STOP PUSHBUTTON.*

b. Press the **RESET BUTTON** (*fig.2-2*).



*figure 2-2: Press the RESET BUTTON.*


c. Press the **START BUTTON** (fig.2-3).



*figure 2-3: Press the START BUTTON.*

## LOCKOUT and TAGOUT


1. Performing a LOCKOUT-TAGOUT on the LABELER.
  - a. Notify all affected employees of the lockout.
  - b. Shutdown the machine by following the normal method of shutdown.
  - c. Disconnect the AIR SUPPLY (*fig. 1-1*).

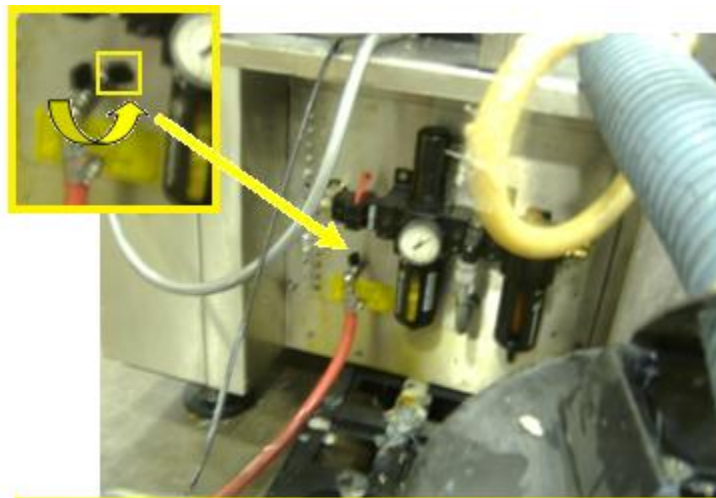

**Turn the air line toggle switch to the OFF position.**

*figure 1-1: Turning OFF the AIR SUPPLY*

d. Turn the MAIN POWER SWITCH to the OFF POSITION (*fig.1-2*).

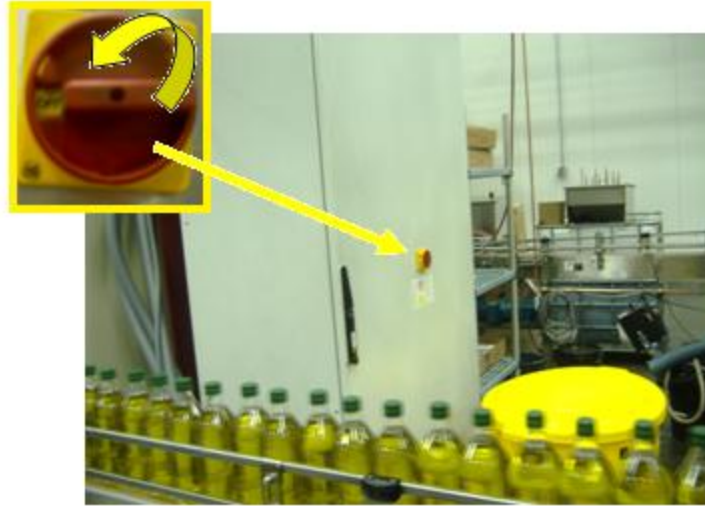

*figure 1-2: Turn the MAIN POWER SWITCH OFF.*

e. Attempt to start the LABELER by pressing the START BUTTON (*fig.1-3*).



*figure 1-3: Try to start the LABELER.*

f. Apply the LOCKOUT LOCK to the MAIN POWER SWITCH(*fig. 1-4*).



*figure 1-4: Lock out MAIN POWER SWITCH.*